



INSTALL OF ADA TRUNCATED DOME DETECTABLE (TACTILE) PAVEMENT SHALL BE PERFORMED AT ALL COSTS INVOLVED SHALL BE INCLUDED IN UNIT COST OF "CONCRETE HANDICAP RAMP" (SEE INSTALL DETAIL)

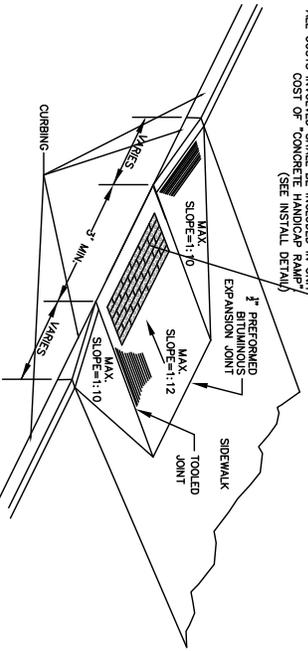


CONCRETE HANDICAP RAMP DETAIL

NOTE:
 1. FINISH: BROOM FINISH PERPENDICULAR TO TRAFFIC AND WITH PICTURE FRAME EDGES.
 2. ALL COSTS INVOLVED SHALL BE INCLUDED IN UNIT COST OF "CONCRETE HANDICAP RAMP".

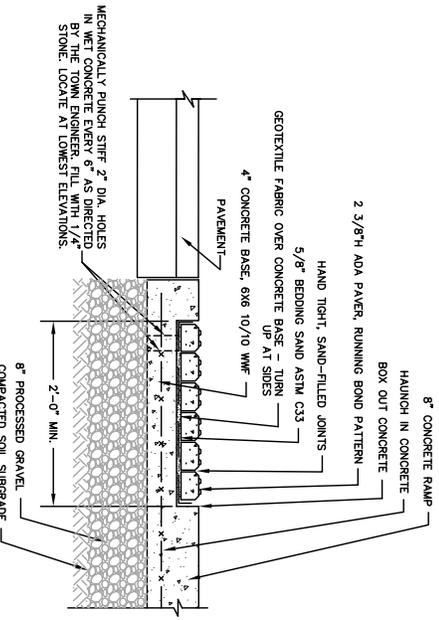

ADA DETECTABLE (TACTILE) WARNING PAVES INSTALLATION AT HC RAMP

NOTE:
 1. CONTRACTOR TO PROVIDE "RED" COLOR ONLY FOR ADA PAVES. PAVES ARE SUPPLIED BY: CONSTRUCTION MATERIALS INC., WESTBROOK CONCRETE BLOCK, HAYNES MATERIALS, OR A LOCAL BLOCK SUPPLIER.

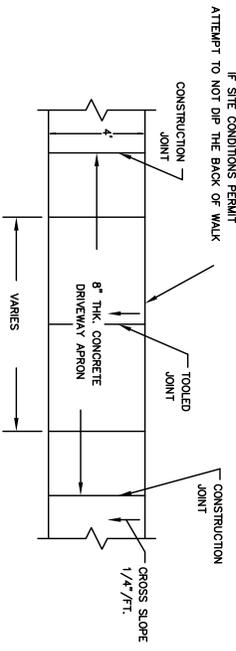


IF SITE CONDITIONS PERMIT ATTEMPT TO NOT DIP THE BACK OF WALK

IF SITE CONDITIONS PERMIT ATTEMPT TO NOT DIP THE BACK OF WALK


PLAN

NOTES:
 1. FINISH: BROOM FINISH WITH PICTURE FRAME EDGES.
 2. RUN SIDEWALK CONTINUOUSLY THROUGH DRIVEWAY.
 3. DRIVE TO BE 8" THICK WITH 6X6 - 10/10 WVF.
 4. USE 3,000 PSI, 5% AIR ENTRAINED CONCRETE.

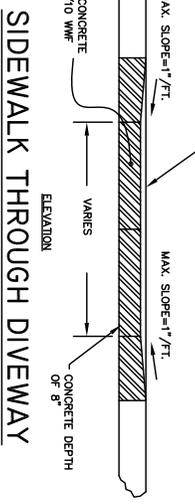

SIDEWALK THROUGH DIVERWAY


SIDEWALK DETAILS FOR CONTRACTORS

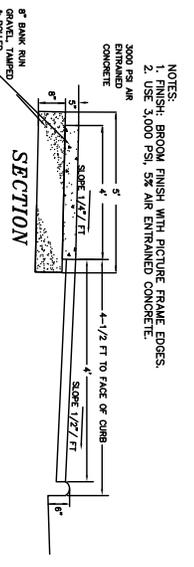

NOTES:
 1. FINISH: BROOM FINISH WITH PICTURE FRAME EDGES.
 2. USE 3,000 PSI, 5% AIR ENTRAINED CONCRETE.

SECTION

PLAN



NOTES:
 1. FINISH: BROOM FINISH WITH PICTURE FRAME EDGES.
 2. USE 3,000 PSI, 5% AIR ENTRAINED CONCRETE.

SECTION

PLAN