



### CONCRETE HANDICAP RAMP

- \* HANDICAP RAMP SHALL CONFORM TO DETAIL ON CURRENT CTDOT CONCRETE SIDEWALK RAMP(S) GUIDE SHEETS
- NOTE:
1. FINISH: BROOM FINISH PERPENDICULAR TO TRAFFIC AND WITH PICTURE FRAME EDGES,
  2. PROVIDE 1/2" PREFORMED BITUMINOUS EXPANSION JOINT.
  3. INSTALL ADA TRUNCATED DOME DETECTABLE (TACTILE) WARNING CONCRETE PAVERS OR APPROVED EQUAL, FULL WIDTH OF RAMP. ADA PAVERS IN "RED" COLOR ONLY ARE SUPPLIED BY: O&G INDUSTRIES. METAL DETECTABLE WARNING PLATES MAY BE USED IF SUPPLY IS NOT AVAILABLE AT THE TIME OF CONSTRUCTION.


### ADA DETECTABLE (TACTILE) WARNING PAVER INSTALLATION AT HC RAMP

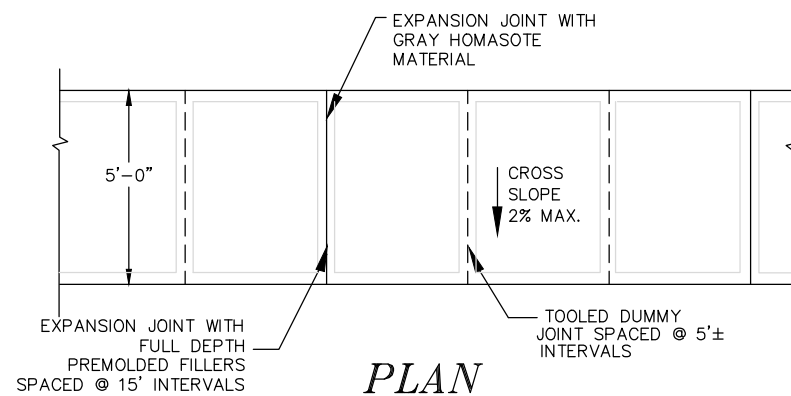


- NOTES:
1. FINISH: BROOM FINISH PERPENDICULAR TO TRAFFIC AND WITH PICTURE FRAME EDGES.
  2. SIDEWALK TO BE 5" THICK WITH 6X6 - 10/10 WWF.
  3. USE 4,400 PSI, CLASS F CONCRETE.

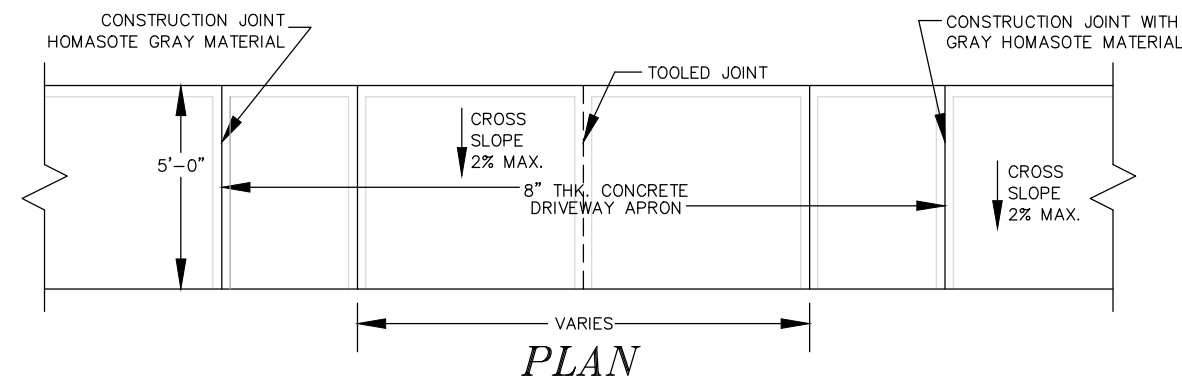


- NOTES:
1. FINISH: BROOM FINISH PERPENDICULAR TO TRAFFIC AND WITH PICTURE FRAME EDGES.
  2. RUN SIDEWALK CONTINUOUSLY THROUGH DRIVEWAY.
  3. DRIVE TO BE 8" THICK WITH 6X6 - 10/10 WWF.
  4. HAUNCH FRONT EDGE IF CONCRETE DRIVEWAY ABUTS ROAD.
  5. USE 4,400 PSI, CLASS F CONCRETE.

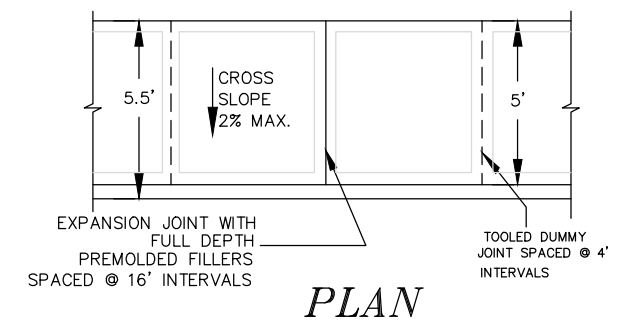


- NOTES:
1. FINISH: BROOM FINISH WITH PICTURE FRAME EDGES.
  2. USE 4,400 PSI, CLASS F CONCRETE.

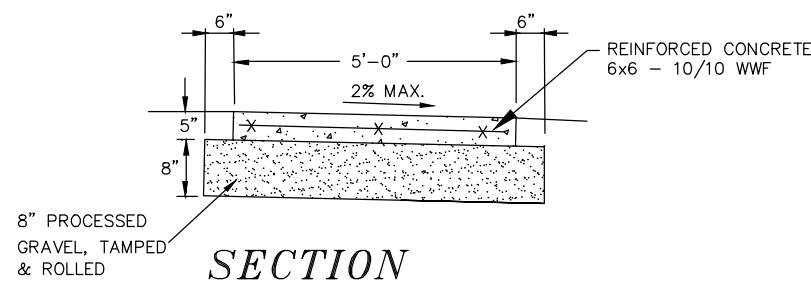

SIDEWALK DETAIL

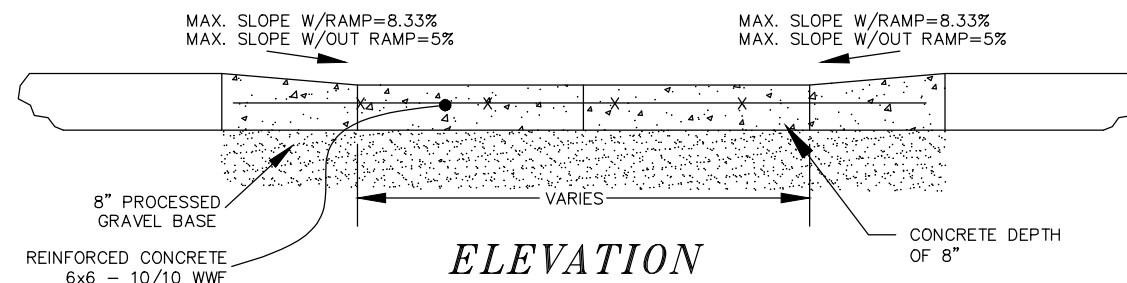

SIDEWALK THROUGH DRIVEWAY



MONOLITHIC CURB SIDE WALK DETAIL

## SIDEWALK DETAILS FOR CONTRACTORS